

Indoor full - pre maintenance




P1.56/P1.95/P2/P2.5/P2.604/P2.976/3.91
500×500mm/ 500×250mm / 500×1000mm

Product Parameters


Pixel Pitch(mm)	1.56	1.95	2	2.5	2.604	2.976	3.91
Color	RGB / Full Color						
Module Technology	SMD / GOB						
Maintenance Method	Front Maintenance						
Scan	1/64	1/32	1/40	1/32	1/32	1/28	1/16
Pixel Density(dots/m²)	409600	262144	250000	160000	147474	112896	65536
Module Size(mm)	250×250×14						
Cabinet Size(mm)	500×500 / 500×250 / 500×1000						
Module Resolution(dots)	160x160	128×128	125×125	100×100	96 ×96	84×84	64×64
Brightness(cd/m²)	≥800						
Module Weight(Kg)	0.43						
Refresh Rate(Hz)	≥3840 / 7680						
Grey Scale(Bit)	14						
Working Temperature	-10°C-40°C/10%RH-60%RH (Non Condensing)						
Life Span	100,000 Hours						
Best Viewing Distance(m)	≥1.25	≥1.5	≥1.8	≥2	≥2.5	≥3.076	≥4

4. Module Front Service Magnetic



Module Front

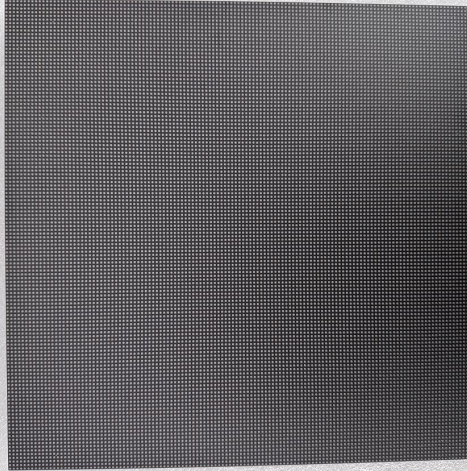

Maintenance Tool

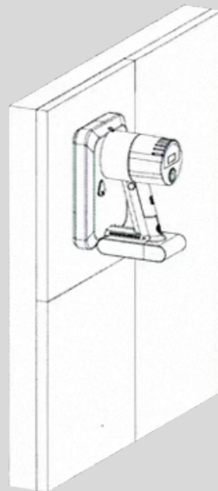

Module Back

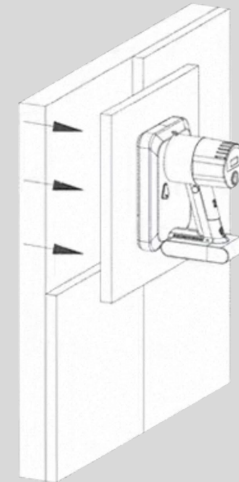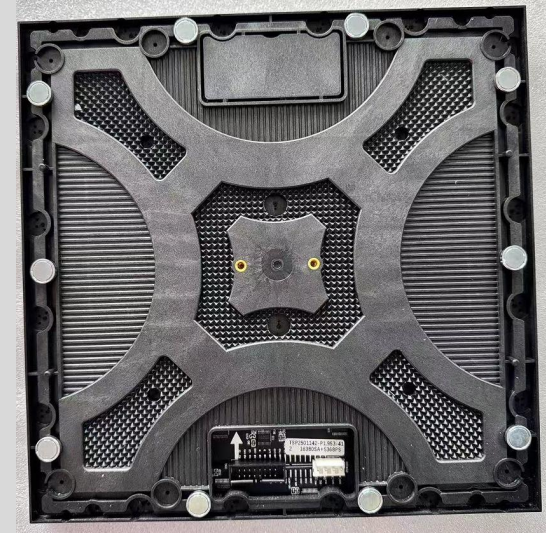

5. Display Application Via Control Box



室内完全前维护 *Indoor full - pre maintenance*

1000X250mm

1000X250Z 250x250mm
P1. 5625/P1. 953/P2/P2. 5/P2. 604/P2. 976/P3. 91

参数Spec.

箱体尺寸Size	1000X250X45.5mm
箱体重量Weight	3.45kg(不含套件与电源/Not include suite and power supply)
材质Material	铝Aluminum
单箱套件数Single cabinet suite number	每箱4个模组 4 modules per cabinet
安装方式Installation	吊梁吊装及固定安装Crane girder hoisting and fixed installation
颜色Color	灰色 Gray
使用环境Working environment	室内Indoor
标准配件Standard accessories	2个定位销、3套快速锁、2个电源安装压条、1.3个连接片 2 positioning pins, 3 quick locks, 2 power board fixing strip, 1.3 Connection accessories

细节展示The details show

The positioning pin 定位销	Quick lock 快速锁	Connection accessories 连接片	Power board fixing strip 电源安装压条
----------------------------	-------------------	-------------------------------	------------------------------------

Control system diagram of Indoor Led Screens

6. Indoor full -pre maintenance Cabinet Images

室内完全前维护 *Indoor full - pre maintenance*



250x250mm **1000Z**

P1. 5625/P1. 953/P2/P2. 5/P2. 604/P2. 976/P3. 91

参数Spec.

箱体尺寸Size	1000X500X45.5mm
箱体重量Weight	6.7kg (不含套件与电源/Not include suite and power supply)
材质Material	铝Aluminum
单箱套件数Single cabinet suite number	每箱8个模组 8 modules per cabinet
安装方式Installation	吊梁吊装及固定安装Crane girder hoisting and fixed installation
颜色Color	灰色 Gray
使用环境Working environment	室内Indoor
标准配件Standard accessories	2个定位销、4套快速锁、 4个电源安装压条、1.3个连接片 2 positioning pins, 4 quick lock, 4 power board fixing strip, 1.3 Connection accessories

细节展示The details show



室内完全前维护 *Indoor full - pre maintenance*



500X250Z 250x250mm

P1. 5625/P1. 953/P2/P2. 5/P2. 604/P2. 976/P3. 91

参数Spec.

箱体尺寸Size	500X250X45.5mm
箱体重量Weight	2kg (不含套件与电源/Not include suite and power supply)
材质Material	铝Aluminum
单箱套件数Single cabinet suite number	每箱2个模组 2 modules per cabinet
安装方式Installation	吊梁吊装及固定安装Crane girder hoisting and fixed installation
颜色Color	灰色 Gray
使用环境Working environment	室内Indoor
标准配件Standard accessories	2个定位销、3套快速锁、 2个电源安装压条、1.3个连接片 2 positioning pins, 3 quick locks, 2 power board fixing strip, 1.3 Connection accessories

细节展示The details show



室内完全前维护 *Indoor full - pre maintenance*



500Z 250x250mm

P1. 5625/P1. 953/P2/P2. 5/P2. 604/P2. 976/P3. 91

参数Spec.

箱体尺寸Size	500X500X45.5mm
箱体重量Weight	2.95kg (不含套件与电源/Not include suite and power supply)
材质Material	铝Aluminum
单箱套件数Single cabinet suite number	每箱4个模组 4 modules per cabinet
安装方式Installation	吊梁吊装及固定安装Crane girder hoisting and fixed installation
颜色Color	灰色 Gray
使用环境Working environment	室内Indoor
标准配件Standard accessories	2个定位销、4套快速锁、2个电源安装压条、1.3个连接片 2 positioning pins, 4 quick lock, 2 power board fixing strip, 1.3 Connection accessories

细节展示The details show



室内完全前维护 *Indoor full - pre maintenance*



750X250Z 250x250mm


P1. 5625/P1. 953/P2/P2. 5/P2. 604/P2. 976/P3. 91

参数Spec.

箱体尺寸Size	750X250X45.5mm
箱体重量Weight	2.8kg (不含套件与电源/Not include suite and power supply)
材质Material	铝Aluminum
单箱套件数Single cabinet suite number	每箱3个模组 3 modules per cabinet
安装方式Installation	吊梁吊装及固定安装Crane girder hoisting and fixed installation
颜色Color	灰色 Gray
使用环境Working environment	室内Indoor
标准配件Standard accessories	2个定位销、3套快速锁、2个电源安装压条、1.3个连接片 2 positioning pins, 3 quick locks, 2 power board fixing strip, 1.3 Connection accessories

细节展示The details show






Brightness Reaches
 $\geq 600-800 \text{ cd/m}^2$




Eye-friendly design for
comfortable viewing
over extended periods



≥ 3840 or 7680Hz for
flicker free, camera
friendly visuals



IP34 waterproof
and dustproof
ratings



High Grayscale level ≥ 16



Front access for quick
on site repairs

7. Wide Range of Applications

